

Emergency
Lighting Kits For FL, FL-C



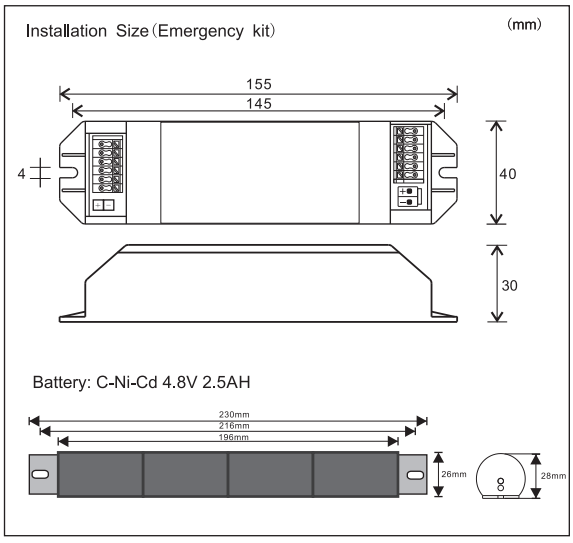


Test switch
Mounting hole 10 mm dia
Lead length 300mm



LED status indicator
Charging Green

Mounting hole 7.0mm dia
Lead length 600mm



Standard of Application

CE | EN 60923 | EN 61347

Specifications

- Non-flammable polymer injection - frame.
- Non-flammable PCB card.
- Effective quality control throughout the production process ensuring complete and fault-free production.
- Can be used with magnetic and electronic ballasts.
- Provides lighting through its integrated ballast when energized.
- Provides lighting up to 3 hours during energy cut-off.
- Used with a 6V NiCd battery.
- Equipped with battery over charge and discharge protection.
- Equipped with a red LED charge indicator.
- 24-48 hours of battery charging time.
- Quiet and vibration free operation.
- Screwless connectors ensure ease of assembly and time savings.
- Offered options include green LED indicating discharge status and test button.



Product Details

Order Code	Type	Voltage (V)	Lamp Type	Operating Temperature	Dimensions (mm) a b c d	Pcs/Pack
CST 180801	2h-3h	220-240	TL-D 18-36-58	-25/+50˚C	-	10
CST 180401	2h-3h	220-240	PL-C 18-26	-25/+50˚C	-	10
CST 180501	2h-3h	220-240	TL5 14-28-35-54	-25/+50˚C	-	10