PLL Lamps
Parabolic Luminaires



Technical Drawing



Light Distribution Curve

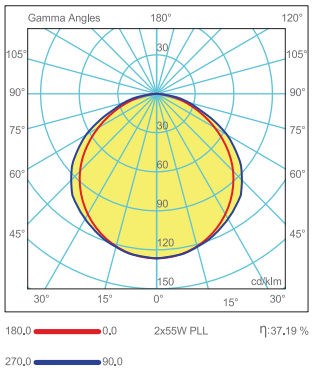

Mechanical Specifications

+ 0,50 mm thick metal frame with electrostatic powder coating. Stainless steel latches positioned to prevent falling of the framework. Ceiling tile compatible model including 4 extra brackets and screws for drywall ceiling installations

Optical Specifications

+ "anodized aluminium reflector" maintaining its optical properties, non-yellowing and non- discolouring through-out lifetime of the luminaire. Anti-glare, highly reflective lamellae.

Technical & Electrical Specifications

- Luminaires for fluorescent PLL lamps
- Connection for operation on 220V-50/60Hz with electronic ballast .
- Connection for operation with electronic ballast dimmable (lamps PLL).

Options

- Connection for emergency lighting system.
- Mirro or Matt Reflector





Fields of Application



Standards of Application



Product Details

Order Code	Power (W)	Lamp Type	Power Factor	Dimensions (mm) a b c	Weight (kg)	Volume (m^3)	Base	Pcs/Pack	Ballast Type Options
CST 010401	3x36	PL-L	>0.95	598x598x85	-	-	2G11	2	Electronic
CST 010402	3x40	PL-L	>0.95	598x598x85	-	-	2G11	2	Electronic
CST 010403	3x55	PL-L	>0.95	598x598x85	-	-	2G11	2	Electronic
CST 010404	4x36	PL-L	>0.95	598x598x85	-	-	2G11	2	Electronic
CST 010405	4x40	PL-L	>0.95	598x598x85	-	-	2G11	2	Electronic
CST 010406	4x55	PL-L	>0.95	598x598x85	-	-	2G11	2	Electronic