T5 Single
Parabolic Luminaires

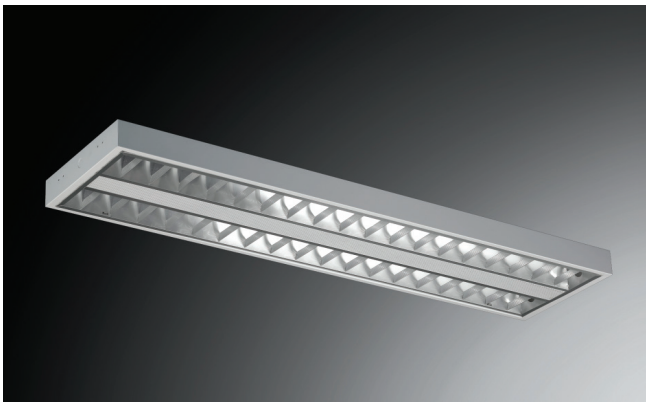

Technical Drawing

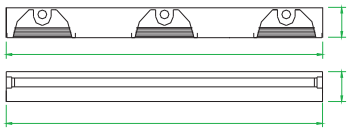

Light Distribution Curve

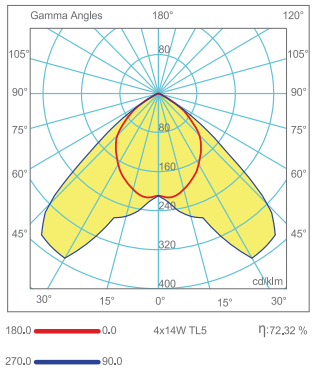

Mechanical Specifications

+ 0,50 mm thick metal frame with electrostatic powder coating. Stainless steel latches positioned to prevent falling of the framework. Ceiling tile compatible model including 4 extra brackets and screws for drywall ceiling installations

Optical Specifications

+ "anodized aluminium reflector" maintaining its optical properties, non-yellowing and non- discolouring through-out lifetime of the luminaire. Anti-glare, highly reflective lamellae.

Technical & Electrical Specifications

- Luminaires for fluorescent lamps T16 (T5) and LED Tube.
- Connection for operation on 220V-50/60Hz with electronic ballast (IT16, TC-SEL, TC-L).
- Connection for operation with electronic ballast dimmable (lamps T16, TC-SEL, TC-L).

Options

- Connection for emergency lighting system .
- Mirror or Matt Reflector

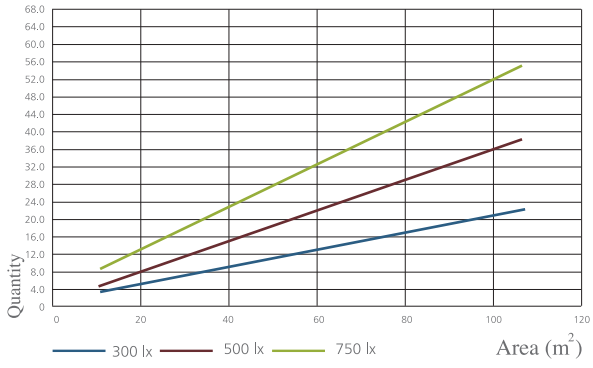

Fields of Application

Standards of Application

CE | 230V 50-60Hz | F | IP 20 | EN 60598

Product Details

Order Code (Fluorescent)	Order Code (LED Tube)	Power (W)	Lamp Type	Power Factor	Dimensions (mm) a b c	Base	Pcs/Pack	Ballast Type Options
CST 010543	CST 010201	2x14/9	TL-D	>0.95	570x298x60	G5	2	Electronic
CST 010544	CST 010202	3x14/9	TL-D	>0.95	570x598x60	G5	2	Electronic
CST 010545	CST 010203	4x14/9	TL-D	>0.95	570x598x60	G5	2	Electronic
CST 010546	CST 010204	2x28/18	TL-D	>0.95	1170x298x60	G5	2	Electronic
CST 010547	CST 010205	3x28/18	TL-D	>0.95	1170x598x60	G5	2	Electronic
CST 010548	CST 010206	4x28/18	TL-D	>0.95	1170x598x60	G5	2	Electronic