# T8 FL & LED Tube
## Batten Luminaires



### Technical Drawing

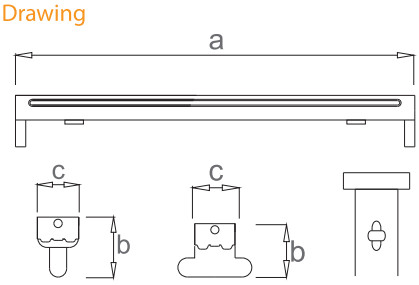


### Light Distribution Curve

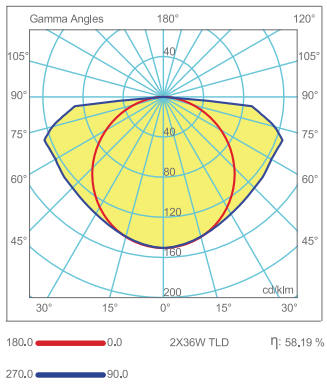


### Mechanical Specifications

+ With 0,50 mm thick metal frame with electrostatic powder coating. Easy installation thanks to UV reinforced polymer locking system

### Optical Specifications

+ Luminaires for fluorescent lamps T26.
+ Connection for operation with electronic ballast dimmable (lamps T26).
+ Easilly Connecting for emergency lighting system.

### Technical & Electrical Specifications

+ Connection for operation on 220V-50Hz with conventional ballast and power factor correction capacitor (lamps T26)
+ Connection for operation on 220V-50/60Hz with electronic ballast (lamps T26).

### Options

+ Emergency lighting unit application up to 3 hours.
+ LED tube applications

### Fields of Application



Standards of Application




### Product Details

| Code Order (FL) | Code Oder (LED Tube) | Power (W) | Lamp Type | Power Factor | Dimensions | Base | Pcs/Pack | Ballast Type |
|---|---|---|---|---|---|---|---|---|
| CST 040801 | CST 040101 | 1x18/12 | TL-D | >0.95 | 620X52 | G13 | 6 | Magnetic Electronic |
| CST 040802 | CST 040102 | 2x18/12 | TL-D | >0.95 | 620X52 | G13 | 6 | Magnetic Electronic |
| CST 040803 | CST 040103 | 1x36/24 | TL-D | >0.95 | 1230x52 | G13 | 6 | Magnetic Electronic |
| CST 040804 | CST 040104 | 2x36/24 | TL-D | >0.95 | 1230x52 | G13 | 6 | Magnetic Electronic |