
T8 FI & LED Tube
Reflector Luminaires



Technical Drawing



Light Distribution Curve

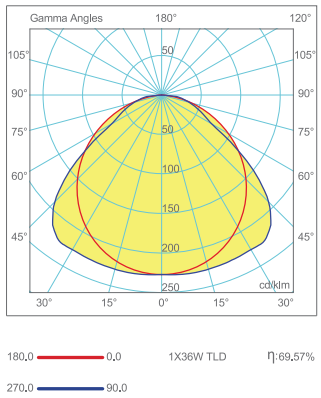

Mechanical Specifications

+ Metal frame with electrostatic powder coating. Easy installation thanks to UV reinforced polymer locking system

Optical Specifications

+ Electrostatic powder coated non- yellowing metallic reflector providing optimum diffusion.
+ With "anodized aluminium reflector" maintaining its optical properties throughout lifetime of the luminaire without yellowing or discoloration.
+ Luminaires for fluorescent lamps T26 (T8).
+ Connection for emergency lighting system (lamps T26).

Technical & Electrical Specifications

+ Connection for operation on 220V-50Hz with conventional ballast and power factor correction capacitor (lamps T26)
+ Connection for operation on 220V-50/60Hz with electronic ballast (lamps T26).


Options

+ Emergency lighting unit application up to 3 hours.
+ LED Tube Lamp applications

Fields of Application



Standards of Application



Product Details

Code Order (FL)	Code Oder (LED Tube)	Type	Power (W)	Lamp Type	Power Factor	Dimensions	Base	Pcs/Pack	Ballast Type	
CST 040805	CST 040109	Aluminium	1x18/12	TL-D	>0.95	612x166	G13	10	Magnetic	Electronic
CST 040806	CST 040110	Aluminium	2x18/12	TL-D	>0.95	612x166	G13	10	Magnetic	Electronic
CST 040807	CST 040111	Aluminium	1x36/24	TL-D	>0.95	1240x166	G13	10	Magnetic	Electronic
CST 040808	CST 040112	Aluminium	2x36/24	TL-D	>0.95	1240x166	G13	10	Magnetic	Electronic
CST 040809	CST 040113	Metallic	1x18/12	TL-D	>0.95	612x166	G13	10	Magnetic	Electronic
CST 040810	CST 040114	Metallic	2x18/12	TL-D	>0.95	612x166	G13	10	Magnetic	Electronic
CST 040811	CST 040115	Metallic	1x36/24	TL-D	>0.95	1240x166	G13	10	Magnetic	Electronic
CST 040812	CST 040116	Metallic	2x36/24	TL-D	>0.95	1240x166	G13	10	Magnetic	Electronic