

T8 - T5 Fl & LED Tube
V- Shape Luminaires



Technical Drawing

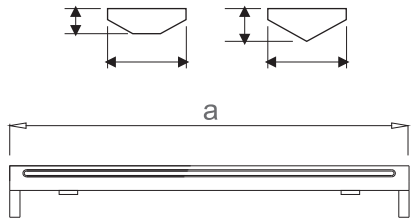

Light Distribution Curve

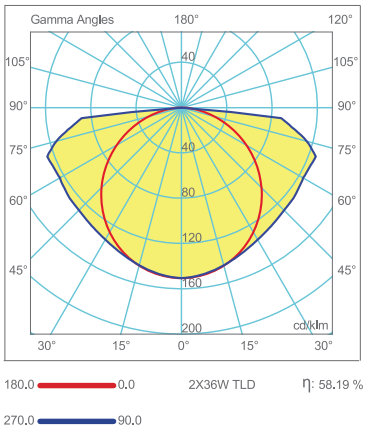

Mechanical Specifications

+ With 0,50 mm thick metal frame with electrostatic powder coating. Easy installation thanks to UV reinforced polymer locking system

Optical Specifications

+ Electrostatic powder coated non- yellowing metallic V-Shape providing optimum diffusion.
+ Luminaires for fluorescent lamps T26, T16.
+ Connection for operation with electronic ballast dimmable (lamps T26, T16).
+ Connection for emergency lighting system (lamps T26, T16).

Technical & Electrical Specifications

+ Connection for operation on 220V-50Hz with conventional ballast and power factor correction capacitor (lamps T26)
+ Connection for operation on 220V-50/60Hz with electronic ballast (lamps T26, T16).


Options

+ Emergency lighting unit application up to 3 hours.
+ LED Tube Lamp applications

Fields of Application



Standards of Application



Product Details

Code Order (FL-T5)	Code Order (FL-T8)	Code Oder (LED Tube)	Type	Power (W)	Lamp Type	Power Factor	Dimensions (T5 & T8)		Base	Ballast Type	
CST 040521	CST 040821	CST 040133	-	1x14/18/12	TL-D	>0.95	575x97	612x166	G13/G5	Magnetic	Electronic
CST 040522	CST 040822	CST 040134	-	2x14/18/12	TL-D	>0.95	575x107	612x166	G13/G5	Magnetic	Electronic
CST 040523	CST 040823	CST 040135	-	1x28/36/24	TL-D	>0.95	1175x97	1240x166	G13/G5	Magnetic	Electronic
CST 040524	CST 040824	CST 040136	-	2x28/36/24	TL-D	>0.95	1175x107	1240x166	G13/G5	Magnetic	Electronic